




Featuring the innovative Uniclic® locking system, Style Lock™ is the only solid Green flooring available in a Click floating floor to reduce installation time and costs. Made from 100% renewable bamboo with Style Green Technology™ and featuring a luxurious wide board plank, Style Lock™ is the premium choice for both commercial and residential installations. Now with StyleGuard™ coating technology for an even more durable finish.

NATURAL COLLECTION (Available in Matte or UltraMatte)




DESIGNER COLLECTION (Available in Semi-Gloss or Matte)

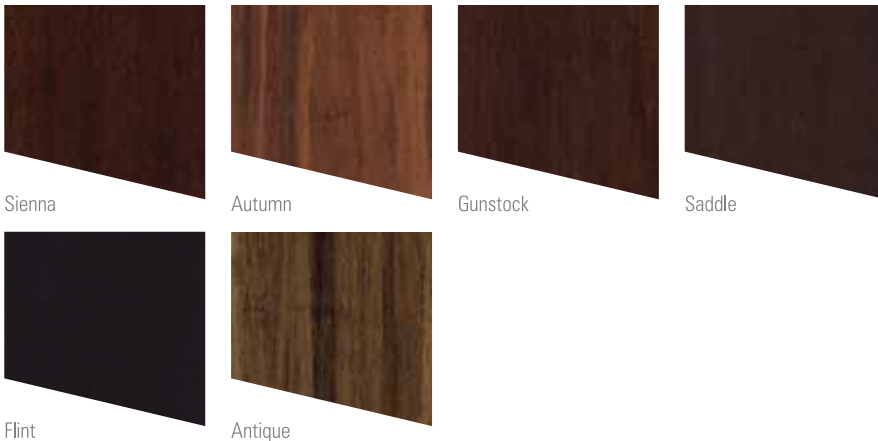

KEY FEATURES:


- 100% renewable and sustainable bamboo
- Extremely hard and stable with excellent indentation resistance
- Only solid board available with Uniclic®locking system
- No glue, nails or staples leads to a much faster, easier and less expensive installation
- Easy to repair and replace individual boards
- Solid 12mm (0.47") board can be resanded and refinished as required
- Residential and Commercial installation approved
- Exciting range of stains and finishes to complement any interior
- Qualifies for 2 LEED credits

JANKA HARDNESS SCALE (kN)

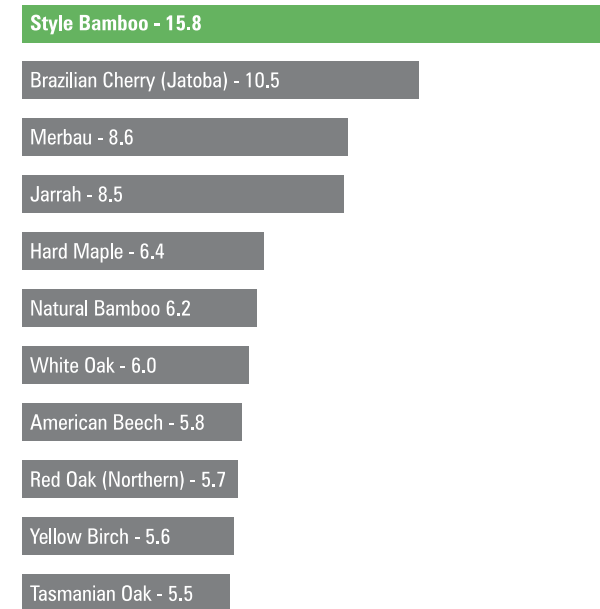

The higher the number, the harder the surface.



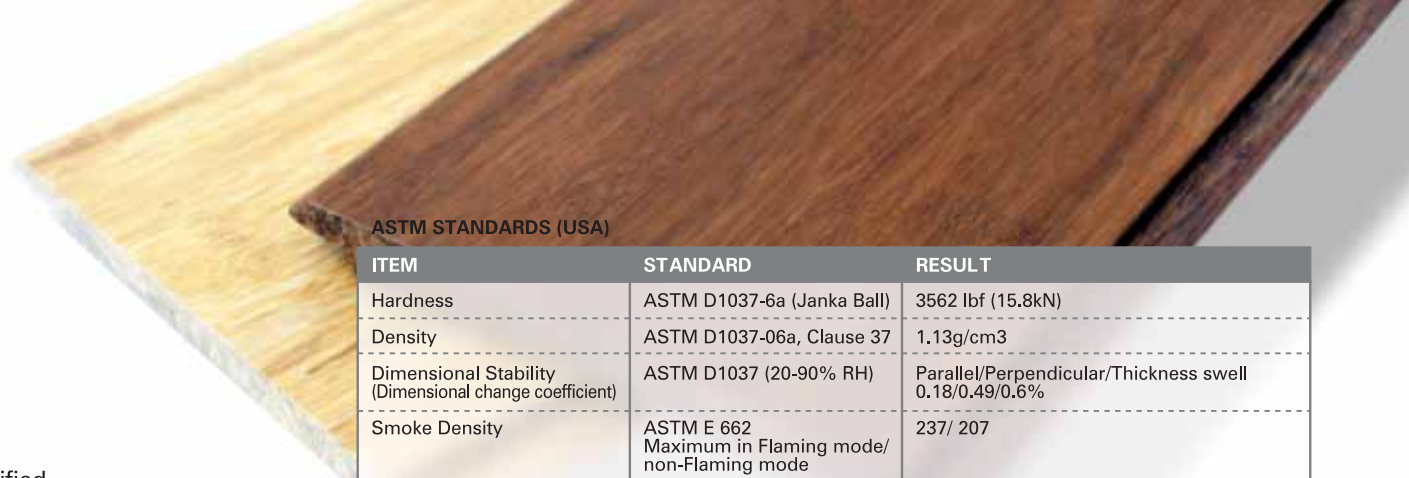

MATERIAL:

100% sustainable and renewable Moso bamboo from FSC certified plantations

CONSTRUCTION:

Solid plank construction

DIMENSIONS:

12mm/ 0.47" (t) x 130mm/ 5.11" (w) x 1830mm/ 72" (l)

COLOURS:

Natural Collection: Natural, Coffee, Suede, Tiger

Designer Collection: Sienna, Autumn, Gunstock, Saddle, Flint, Antique

FINISH:

StyleGuard™ coating system - Durable UV cured aluminium oxide/polyurethane finish available in Semi-Gloss (40-50%), Matte (25-35%) or Ultramatte (6+/-3%).. The coating is water based, solvent free, and complies with European (E1) standards for off-gassing

INSTALLATION:

Micro bevel with Uniclic® floating floor system on all 4 sides

WARRANTY:

Residential: Lifetime Limited (25 Yrs) Warranty on structural integrity of product; 25 Yr Residential Limited Wear Warranty

Commercial: (Natural, Coffee, Suede, Antique only)

15 Yr Limited Structural Warranty; 5 Yr Limited Wear Warranty

ASTM STANDARDS (USA)

ITEM	STANDARD	RESULT
Hardness	ASTM D1037-6a (Janka Ball)	3562 lbf (15.8kN)
Density	ASTM D1037-06a, Clause 37	1.13g/cm3
Dimensional Stability (Dimensional change coefficient)	ASTM D1037 (20-90% RH)	Parallel/Perpendicular/Thickness swell 0.18/0.49/0.6%
Smoke Density	ASTM E 662 Maximum in Flaming mode/ non-Flaming mode	237/ 207
Abrasion Resistance*	ASTM D4060-07	Weight loss (500 cycles) 8mg; Wear Index 15mg per 1000 cycles
Scratch Resistance*	ASTM D5582-00	5H
Slip Resistance*	ASTM D2394-05	Static coefficient of friction/Sliding Coefficient of friction 0.56/ 0.39
Stain Resistance*	ASTM D3023-98 (reap. 2003)	No graying, spotting, wrinkling, discolouration after washing
Formaldehyde Emissions	ASTM D6007-02, UV Vis	0.01ppm (P2 CARB compliant)

* Matte/Semi-Gloss finish only

EN STANDARDS (EUROPE)

ITEM	STANDARD	RESULT
Hardness	Brinell lhd-Werknorm 202	84-0 N/mm2
Density	EN 323:1993	1.14g/cm3
Dimensional Stability	EN 434:1994 (20-80% RH)	Parallel/ Perpendicular 0.12/0.21%
Flammability Resistance	EN 13501-1:2007	Class Cfl-s1
Abrasion Resistance**	SS-EN 14354 (12/16)	1600-1800 revs (WRO)
Scratch Resistance**	Hamberger- Hobel	21N
Adhesion**	SS-EN14354	GT 0/5B
Impact test**	SS-EN 14354	No crack >450mm (EC3)
Slip Resistance**	BGR 151/ DIN 51 130	R10
Formaldehyde Emissions	EN 717-2:1995	0.5mg/m2h (E0)

**Ultramatte finish only

Size (mm)	Packaging	Carton size	m2/carton	Weight (kg)	Cartons/pallet	Pallets/container	Total m2/container
12 x 130 x 1830	5pcs (1 x 5 planks)	63x154x1855	1.19	15	98	12	1399.44

Style Head Office:

Level 1, 172-192 Flinders Street, Melbourne, Victoria, Australia 3000 - info@stylelimited.com www.stylelimited.com

STY-2010-12-27



EU Patent 0843 763 B1 U.S. Patent nr. 6,006,486.



National Wood Flooring Association

